


Linear Bar Grilles


Extruded Aluminum - 1/8" Bars on 1/4" Spacing

Model: XG-2300 F Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 0° Deflection Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 15° Deflection Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 30° Deflection


XG-2300 F/H Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 0° Deflection, With Concealed Mounting **XG-2315 F/H** Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 15° Deflection, With Concealed Mounting **XG-2330 F/H** Floor / Sill / Sidewall Linear Bar Grille 1/8" on 1/4" spacing 30° Deflection, With Concealed Mounting

Models: XG-2300F, XG-2315F and XG-2330F (Standard Spring Clip Mount) End View




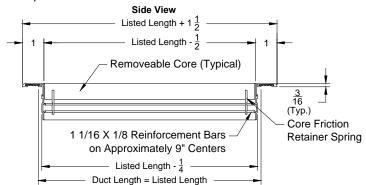

Models: XG-2300 F/H (Concealed Mounting)



Duct =Listed Width



Options: 0°, 15° or 30° Deflection





15° Deflection



Notes: (check if provided)

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
1. AVAIIADIE FINISNES Standard Finish: 01 White Optional Finish (extra charge): 02 Satin Silver 03 Black 04 Clear Anodized 28 Special Color Setup Charge	XG-L9 - Equalizing Grid Mitered Corner XG-DA - Aluminum Damper	Dampers: Widths 3-1/2" and smaller use a single flap style damper. Widths 4" and smaller use Model DA damper. Core only. FSM - Face Screw Mount	 Widths available in 1/2" increments from 1-1/2" to 12". Lengths available in single pieces up to 72". Longer sections are made by joining sections in the field with factory supplied alignment strip.
Optional Finish (no charge): 24 Mil Finish			 Standard mounting in concealed friction spring clips. Available reverse sizes (face bars parallel to the short side).