






Low Profile Single Duct Air Terminal Unit

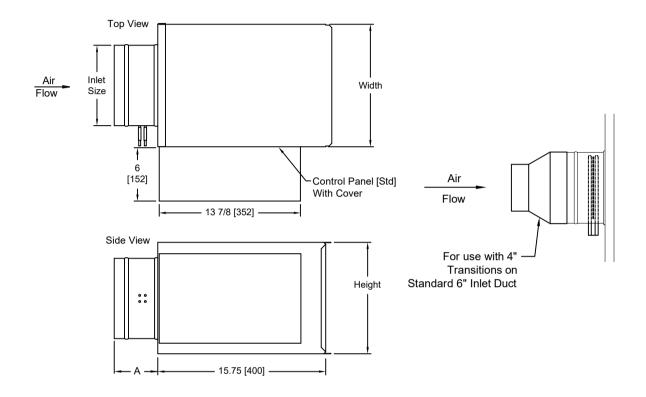

Unit	Inlet Size		Α		Width		Height		Unit wt.	
Size	in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
4	3 7/8	99	10	254	12	305	8	203	12	5
5	4 7/8	124	5	127	12	305	8	203	12	5
6	5 7/8	149	5	127	12	305	8	203	12	5
7	6 7/8	175	5	127	12	305	10	254	15	7
8	7 7/8	200	5	127	12	305	10	254	15	7
9	8 7/8	226	5	127	14	356	12 1/2	318	18	8
10	9 7/8	251	5	127	14	356	12 1/2	318	18	8
12	13 x 9 7/8	330 x 251	5	127	18	457	12 1/2	318	23	10
14	16 1/4 x 9 7/8	413 x 251	5	127	24	610	12 1/2	318	26	12
16	19 3/8 x 9 7/8	492 x 251	5	127	28	711	12 1/2	318	30	14

The standard location for control panel is Right Hand on Low Profile Single Duct Air Terminal Unit. Looking in the direction of airflow, the control panel is on the right.

The control panel will overhang the top and bottom of Unit Sizes 4 - 6 1" [25.4 mm] or $\frac{13}{16}$ " [21 mm] on Unit Size 8 Control Panel Mounting Surface width by height is $13\frac{7}{8}$ " x $9\frac{3}{4}$ "

Unit Sizes 12, 14, & 16 Have Flat Oval Inlet Ducts

Standard Construction								
1/2" Dual Density, Coated Fiberglass	Units Are Constructed With 22 Gauge	Slip & Drive Discharge Connection						
All Insulations Meet NFPA 90A And UL 181	Casing & Inlet Duct	Inlet Airflow Sensor						
All Fiberglass Insulations Have Coated Edges To Prevent Fiber Migration	18 Gauge Equivalent Damper Assembly With Integral Blade Seal							
	Control Panel With Dust Cover							