


# SCV660MD

AMCA 540 and 550 Listed Hurricane Louver  
Miami-Dade and Florida Product Approved  
Extruded Aluminum | Storm Class

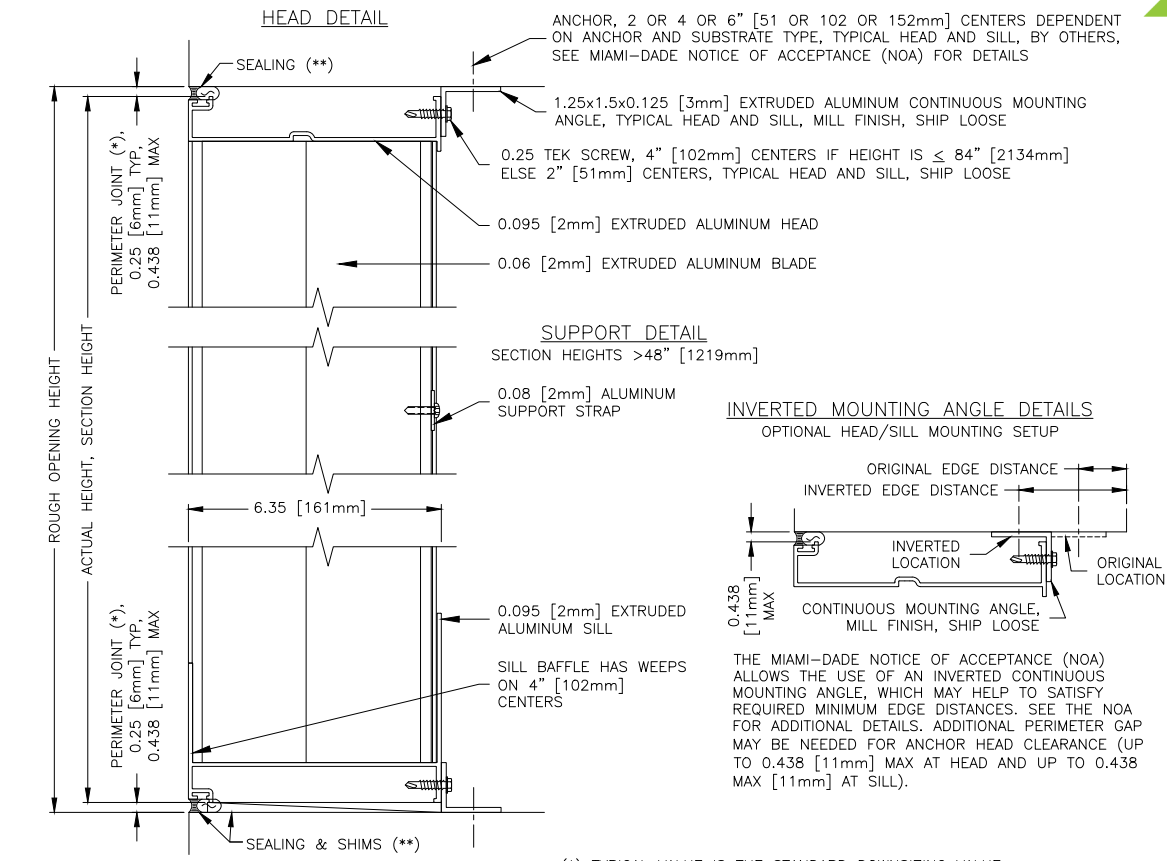

THE MIAMI-DADE NOTICE OF ACCEPTANCE (NOA) ALLOWS THE USE OF AN INVERTED CONTINUOUS MOUNTING ANGLE, WHICH MAY HELP TO SATISFY REQUIRED MINIMUM EDGE DISTANCES. SEE THE NOA FOR ADDITIONAL DETAILS. ADDITIONAL PERIMETER GAP MAY BE NEEDED FOR ANCHOR HEAD CLEARANCE (UP TO 0.438 [11mm] MAX AT HEAD AND UP TO 0.438 MAX [11mm] AT SILL).

(\*) TYPICAL VALUE IS THE STANDARD DOWNSIZING VALUE WHEN ORDERED BASED ON ROUGH OPENING, MAXIMUM VALUE IS THE MAXIMUM ALLOWED BY THE MIAMI-DADE NOTICE OF ACCEPTANCE (NOA).

(\*\*) SEALING, NON-COMPRESSIBLE DEAD-LOAD SHIMS, SEPARATION OF DISSIMILAR MATERIALS ARE BY OTHERS. SEALANT IS REQUIRED AROUND EACH SECTION TO COMPLY WITH AMCA 550 HIGH VELOCITY WIND DRIVEN RAIN TEST.

