


Model: XG-UPI-6650

Universal Plenum Insulated for 1/2" Slot Linear Diffusers

XG-UPI-6650 - Universal Plenum Insulated for 1/2" Slot Linear Diffusers

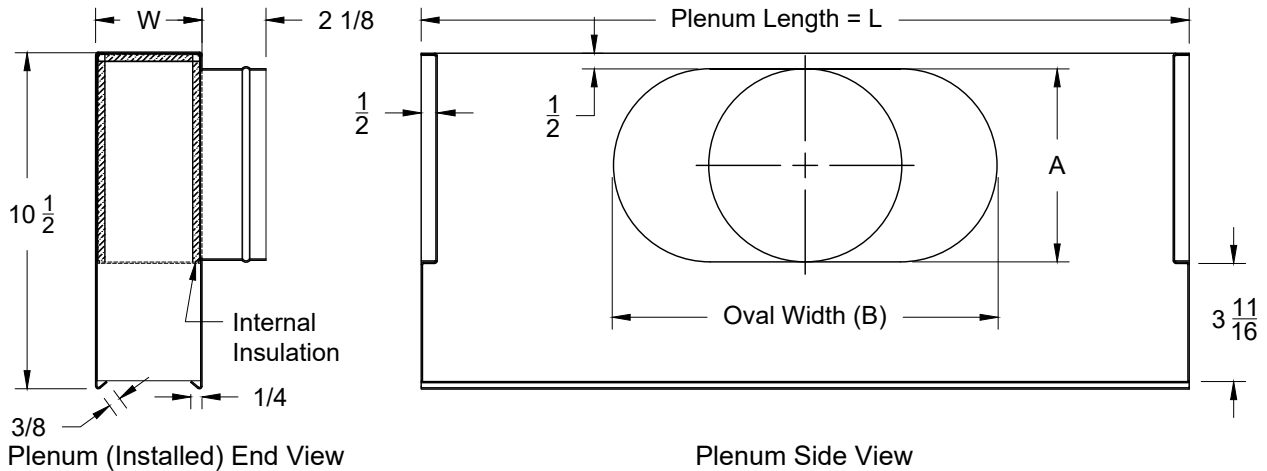

Model		S = Slots	PLENUM
		Slots	W
	1	1/2" Slots	2
	2		3 1/2
	3		4 1/2
	4		6

Model	S = Slots		PLENUM
	Slots		W
	5	1/2" Slots	7
	6		8 1/2
	7		9 1/2
	8		11

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16

L = Listed Size ± Linear End Types

Description	FRAME	Border Size	2 EB / MM	1 EB / MO	No Ends	2 EC	1 EC
T-Bar Lay-In	10-6, 12-6	1 - 1/8"	-2 1/8	- 1 1/16	± 0	± 0	± 0
Screw Mount **	11-1	Note: ** Not Recommended End Type For This Style					
Concealed Mount	12-1	1 - 1/8"	± 0	± 0	± 0	± 0	± 0
T-Bar Lay-In	20-6, 22-6	3/4"	- 1 3/8	- 11/16	± 0	± 0	± 0
T-Bar Lay-In	30-6, 32-6	1/2"	- 7/8	- 7/16	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	40-7, 40-8, 40-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	42-7, 42-8, 42-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Mud Flange	50-1, 52-1	1 13/16	± 0	± 0	± 0	± 0	± 0



1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
	XG-FODR - Face Operated Damper Rod XG-ID - Inlet Damper XG-LQ - Locking Quadrant Damper XG-ROD - Remote Operated Damper	1EC - (1) End Cap 2EC - (2) End Caps 1EB - (1) End Border 2EB - (2) End Borders OO - Open / Open	- Standard Lengths: 24, 36, 48, 60, 72 - Custom Length available for extra charge 12" minimum – 72" maximum - NI - No Inlet

All Dimensions ±1/16"

Model: XG-UPI-6675

Universal Plenum Insulated for 3/4" Slot Linear Diffusers

XG-UPI-6675 - Universal Plenum Insulated for 3/4" Slot Linear Diffusers

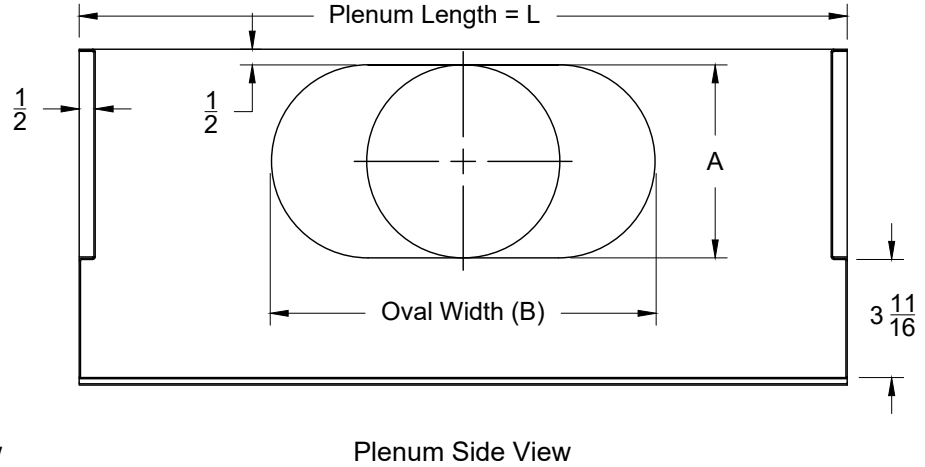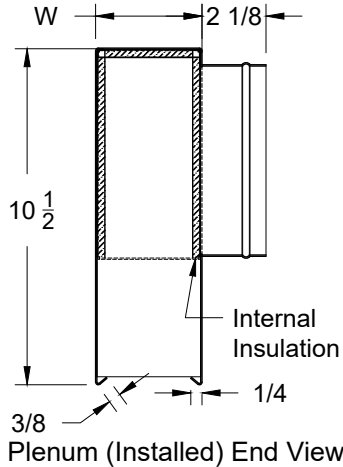

Model	S = Slots		PLENUM
	Slots		W
	1	3/4" Slots	2 1/2
	2		4
	3		5 1/2
	4		7

Model	S = Slots		PLENUM
	Slots		W
	5	3/4" Slots	8 1/2
	6		10
	7		11 1/2
	8		13

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16

L = Listed Size ± Linear End Types

Description	FRAME	Border Size	2 EB / MM	1 EB / MO	No Ends	2 EC	1 EC
T-Bar Lay-In	10-6, 12-6	1 - 1/8"	-2 1/8	- 1 1/16	± 0	± 0	± 0
Screw Mount **	11-1	Note: ** Not Recommended End Type For This Style					
Concealed Mount	12-1	1 - 1/8"	± 0	± 0	± 0	± 0	± 0
T-Bar Lay-In	22-6, 22-6	3/4"	- 1 3/8	- 11/16	± 0	± 0	± 0
T-Bar Lay-In	30-6, 32-6	1/2"	- 7/8	- 7/16	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	40-7, 40-8, 40-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	42-7, 42-8, 42-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Mud Flange	50-1, 52-1	1 13/16	± 0	± 0	± 0	± 0	± 0



1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
	XG-FODR - Face Operated Damper Rod XG-ID - Inlet Damper XG-LQ - Locking Quadrant Damper XG-ROD - Remote Operated Damper	1EC - (1) End Cap 2EC - (2) End Caps 1EB - (1) End Border 2EB - (2) End Borders OO - Open / Open	- Standard Lengths: 24, 36, 48, 60, 72 - Custom Length available for extra charge 12" minimum – 72" maximum - NI - No Inlet

All Dimensions ±1/16"

Model: XG-UP-6610

Universal Plenum Insulated for 1" Slot Linear Diffusers

XG-UPI-6610 - Universal Plenum Insulated for 1" Slot Linear Diffusers

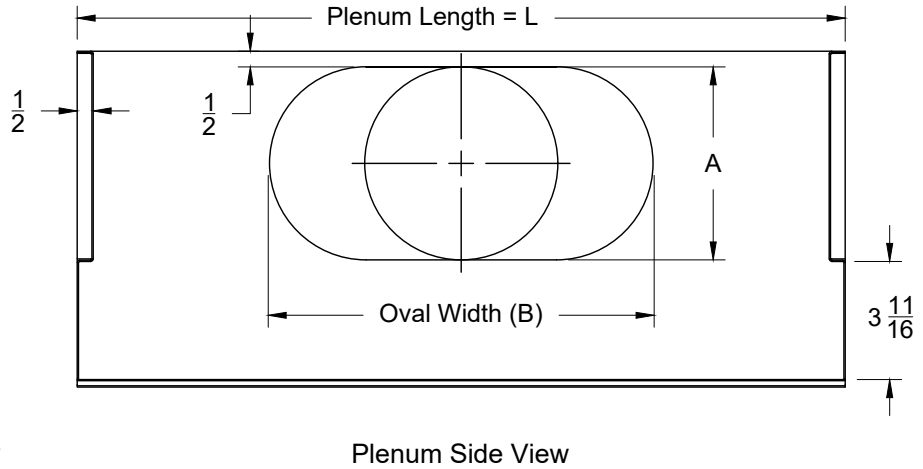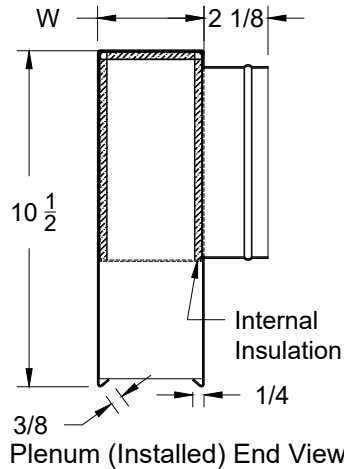

Model	S = Slots		PLENUM
	Slots		W
	1	1" Slots	2 1/2
	2		4 1/2
	3		6
	4		8

Model	S = Slots		PLENUM
	Slots		W
	5	1" Slots	9 1/2
	6		11 1/2
	7		13
	8		15

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16

L = Listed Size ± Linear End Types

Description	FRAME	Border Size	2 EB / MM	1 EB / MO	No Ends	2 EC	1 EC
T-Bar Lay-In	10-6, 12-6	1 - 1/8"	-2 1/8	- 1 1/16	± 0	± 0	± 0
Screw Mount **	11-1	Note: ** Not Recommended End Type For This Style					
Concealed Mount	12-1	1 - 1/8"	± 0	± 0	± 0	± 0	± 0
T-Bar Lay-In	22-6, 22-6	3/4"	- 1 3/8	- 11/16	± 0	± 0	± 0
T-Bar Lay-In	30-6, 32-6	1/2"	- 7/8	- 7/16	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	40-7, 40-8, 40-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	42-7, 42-8, 42-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Mud Flange	50-1, 52-1	1 13/16	± 0	± 0	± 0	± 0	± 0



1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
	XG-FODR - Face Operated Damper Rod XG-ID - Inlet Damper XG-LQ - Locking Quadrant Damper XG-ROD - Remote Operated Damper	1EC - (1) End Cap 2EC - (2) End Caps 1EB - (1) End Border 2EB - (2) End Borders OO - Open / Open	- Standard Lengths: 24, 36, 48, 60, 72 - Custom Length available for extra charge 12" minimum – 72" maximum - NI - No Inlet

All Dimensions ±1/16"

Model: XG-UPI-6615

Universal Plenum Insulated for 1 1/2" Slot Linear Diffusers

XG-UPI-6615 - Universal Plenum Insulated for 1 1/2" Slot Linear Diffusers

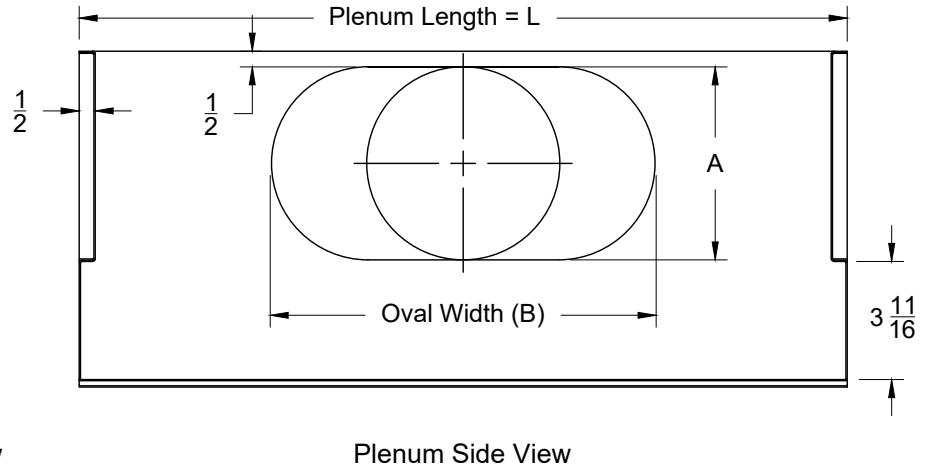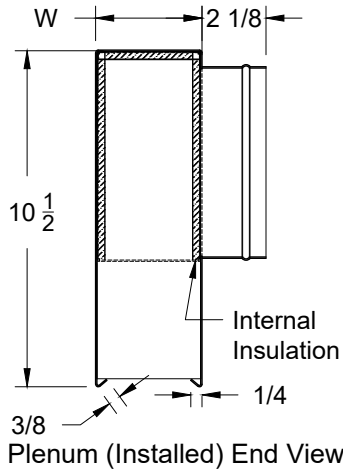

Model	S = Slots		PLENUM	
	Slots		W	
	1	1 1/2" Slots	3	
	2		5 1/2	
	3		7 1/2	
	4		10	

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16

L = Listed Size ± Linear End Types

Description	FRAME	Border Size	2 EB / MM	1 EB / MO	No Ends	2 EC	1 EC
T-Bar Lay-In	10-6, 12-6	1 - 1/8"	-2 1/8	- 1 1/16	± 0	± 0	± 0
Screw Mount **	11-1	Note: ** Not Recommended End Type For This Style					
Concealed Mount	12-1	1 - 1/8"	± 0	± 0	± 0	± 0	± 0
T-Bar Lay-In	22-6, 22-6	3/4"	- 1 3/8	- 11/16	± 0	± 0	± 0
T-Bar Lay-In	30-6, 32-6	1/2"	- 7/8	- 7/16	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	40-7, 40-8, 40-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Concealed Spline, Drop Face, Bolt Slot	42-7, 42-8, 42-9	22/32"	- 1/4	- 1/8	± 0	± 0	± 0
Mud Flange	50-1, 52-1	1 13/16	± 0	± 0	± 0	± 0	± 0

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
	XG-FODR - Face Operated Damper Rod XG-ID - Inlet Damper XG-LQ - Locking Quadrant Damper XG-ROD - Remote Operated Damper	1EC - (1) End Cap 2EC - (2) End Caps 1EB - (1) End Border 2EB - (2) End Borders OO - Open / Open	- Standard Lengths: 24, 36, 48, 60, 72 - Custom Length available for extra charge 12" minimum – 72" maximum - NI - No Inlet

All Dimensions ±1/16"