


## Installation, Operation and Maintenance Manual


Please read and save these instructions for future reference. Read carefully before attempting to assemble, install, operate or maintain the product described. Protect yourself and others by observing all safety information. Failure to comply with these instructions will result in voiding of the product warranty and may result in personal injury and/or property damage.

Maximum Wind-load: +/-150 PSF

### Channel Installation

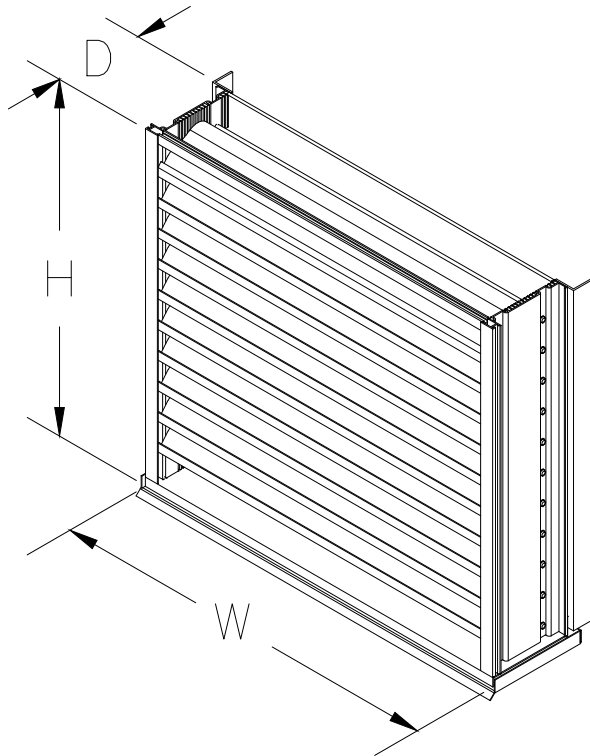


### Flange/Sleeve Installation

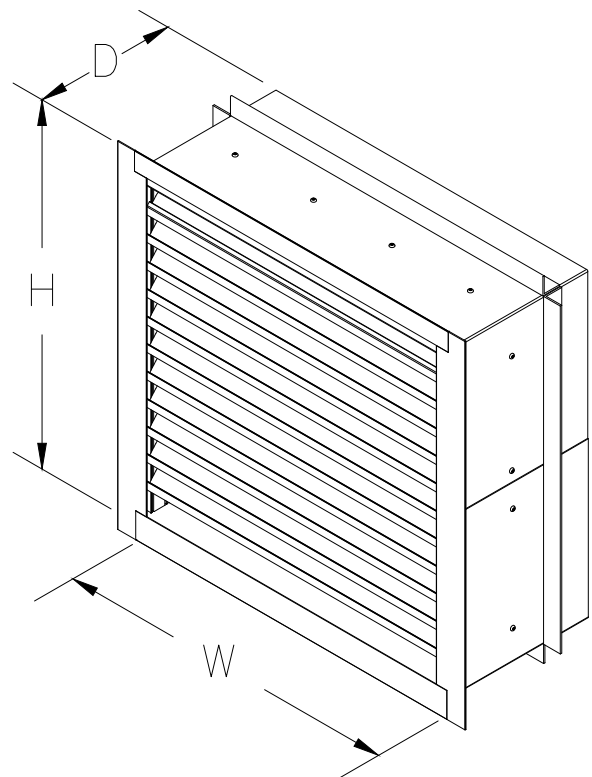

## Channel Installation

### Maximum Size and Installation Information

Model SCH601MDE is a Miami-Dade Approved and Florida Product Approved louver and must be installed in accordance with the installation instructions shown herein. Model SCH601MDE is qualified for installation within concrete/masonry, steel stud, structural steel or wood framed building conditions. Model SCH601MDE is structurally calculated to withstand positive and negative wind-loads up to +/-150 PSF. The maximum typical rough opening height is limited to 48.50 in. and the typical rough opening width is limited to 48.75 in.

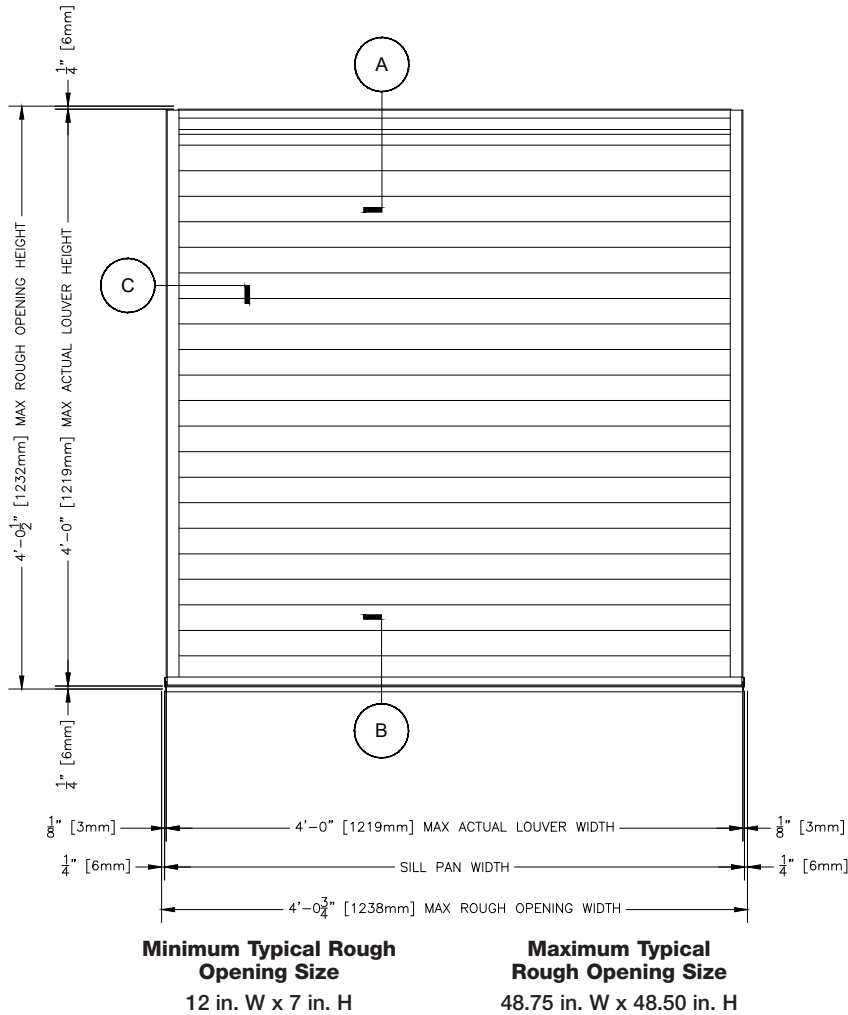


## Building Condition/Substrate Limitations

### Channel Installation


- All steel substrate should be min. 16 Ga. FY= 33 KSI
- All concrete substrate shall be min. 2000 PSI
- All concrete masonry shall be ASTM C90, Type II, grout-filled
- All wood substrate shall be G= 0.42 density or better
- All aluminum substrate shall be min 0.125 in. thick FY=16 KSI

# Channel Installation


## A HEAD DETAIL

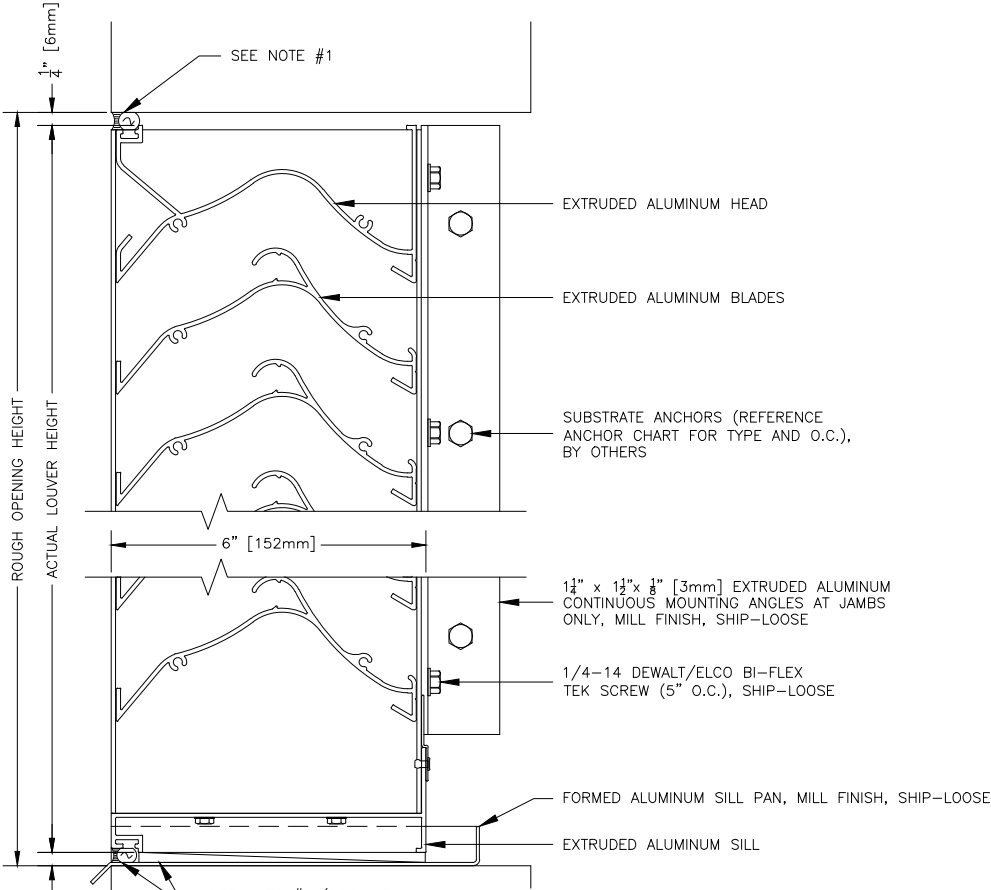


## B SILL DETAIL



## C JAMB DETAIL

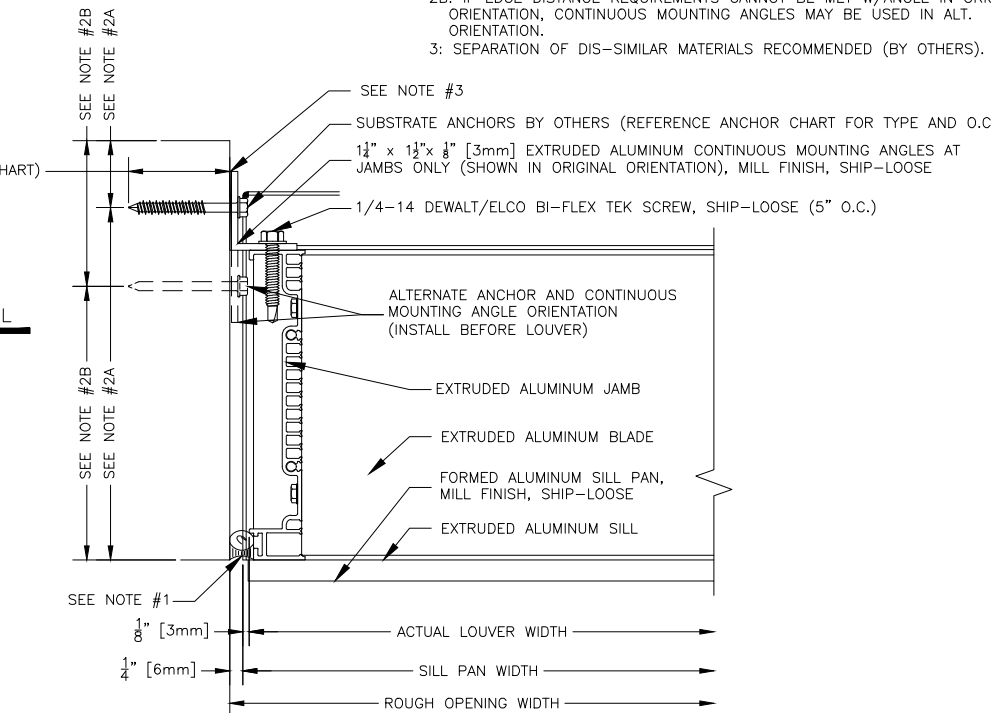

# Channel Installation

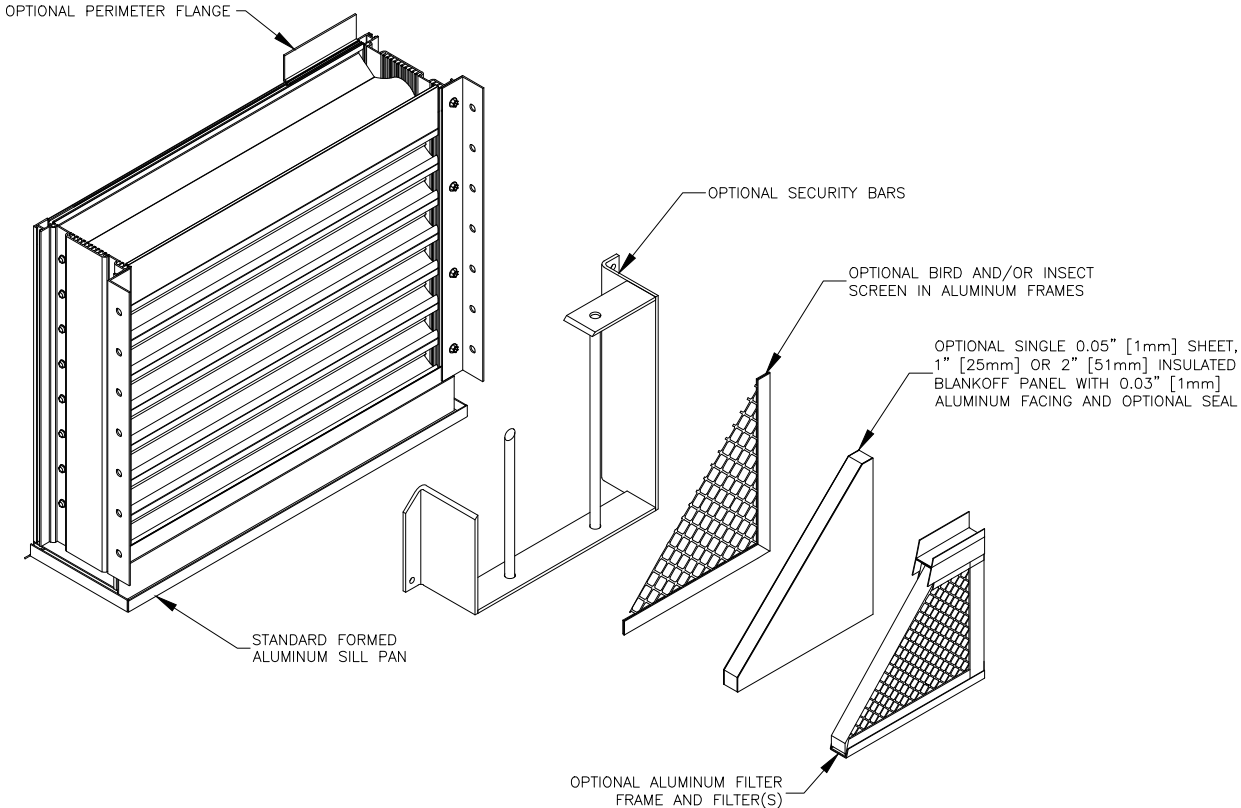


**Channel Installation**

SUBSTRATE AND SUBSTRATE FASTENER TABLE															
SUBSTRATE			SUBSTRATE FASTENER												
TYPE	THICKNESS MIN	MATERIAL MIN	TYPE (ALL FASTENERS ARE HEX HEAD STYLE)	MAT'L	DIA.	EDGE MIN	EMBED. MIN	SPACING MAX *	SPACING MIN *	HEAD DIA. MIN	ANGLE HOLE ITEM 5, MAX	SUBSTRATE HOLE, MAX			
WOOD	3	G DF 0.42	LAG SCREW, 3 INCH MIN LENGTH	300 SS	1/4	1 1/2	23/32	5 3/4	3	1/2	5/16	SEE FASTENER MANUFACTURER INSTRUCTIONS			
					3/8	1 1/2	23/32	6 1/4		5/8				7/16	
STEEL	16 GA (0.056)	Fy 33 KSI Fu 45 KSI	1/4-20 BOLT W/ NUT	300 SS	1/4	5/8	0.056	8	1	1/2 HEAD 9/16 NUT	5/16	SEE FASTENER MANUFACTURER INSTRUCTIONS			
	14 GA (0.070)		1/4-14 DEWALT/ELCO BI-FLEX SCREW, 300 SS HEAD & SHANK W/ COATED STEEL TIP	MULTI				5 5/8						6 3/4	
	12 GA (0.099)							0.070							8
ALUMINUM	1/8	6063-T5	1/4-20 BOLT W/ NUT	300 SS	1/4	1/2	1/8	8	1	1/2 HEAD 9/16 NUT	5/16	SEE FASTENER MANUFACTURER INSTRUCTIONS			
			1/4-14 DEWALT/ELCO BI-FLEX SCREW, 300 SS HEAD & SHANK W/ COATED STEEL TIP	MULTI				7		1/2					
CONCRETE	VARIES WITH SIZE OF FASTENER USED. SEE FASTENER MANUFACTURER INSTRUCTIONS	2 KSI	BUILDEX TAPCON, STAINLESS	410 SS	1/4	1 1/2	1 1/2	5 1/4	2	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS			
								2 1/4						6	
								2 1/2						6 3/8	
								3						6 3/4	
		3 KSI	BUILDEX TAPCON, STAINLESS	410 SS	1/4	1 1/2	1 1/4	1 1/4	4 1/4	3	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS		
									2						5
									3						6
									1 1/2						6 1/4
		2.3 KSI	DEWALT/ELCO AGGRE-GATOR	300 SS	1/4	1 1/2	1 3/4	1 3/8	6 1/2	3	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS		
									1 3/4						6 7/8
		2.9 KSI	DEWALT/ELCO ULTRACON SS4	410 SS	1/4	1	1 3/4	1 3/4	4 3/8	3	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS		
									2 1/2						8
3.4 KSI	DEWALT/ELCO CRETE-FLEX SS4, SMALL HEAD	410 SS	1/4	1	1 3/4	1 3/4	6 3/4	6	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS				
							DEWALT/ELCO CRETE-FLEX SS4, FLANGED HEAD						8		
2.5 KSI	DEWALT/POWERS 316 STAINLESS STEEL WEDGE-BOLT	316 SS	1/4	1 1/2	1 7/8	1 7/8	4 5/8	1	AS MANUFACTURED	5/16	SEE FASTENER MANUFACTURER INSTRUCTIONS				
							2						6 1/8		
							2 3/4						7		
							1 1/2						5 1/2		
GRDUT FILLED CMU	NOTE 1	DEWALT/ELCO AGGRE-GATOR	300 SS	1/4	2	2	8	3	AS MANUFACTURED	1/4	SEE FASTENER MANUFACTURER INSTRUCTIONS				
							NOTE 2						DEWALT/ELCO ULTRACON SS4	410 SS	2
					2 1/2	6 3/4									
NOTE *: MANUFACTURER MAY PROVIDE PILOT HOLES IN MOUNTING ANGLE AT 2" O.C. FOR SUBSTRATE ANCHOR. INSTALLER SHALL USE HOLES WHICH DO NOT VIOLATE SHOWN MIN & MAX SPACING.															
NOTE 1: CONCRETE MASONRY (CMU) SHALL BE > THE FOLLOWING: 6" WIDE, CMU CONFORMING TO ASTM C-90 FILLED WITH 4,747 KSI GRDUT.															
NOTE 2: CONCRETE MASONRY (CMU) SHALL BE > THE FOLLOWING: 6" WIDE, 2 KSI CMU CONFORMING TO ASTM C-90 WITH 1624 KSI GRDUT.															

## Flange/Sleeve Installation

### Maximum Size and Installation Information

Model SCH601MDE is a Miami-Dade Approved and Florida Product Approved louver and must be installed in accordance with the installation instructions shown herein. Model SCH601MDE with Flange/Sleeve is qualified for installation into any substrate that can withstand the loads transferred by the louver, including but not limited to concrete/masonry, aluminum, steel stud, structural steel or wood framed building conditions. Model SCH601MDE is structurally calculated to withstand positive and negative wind-loads up to +/-150 PSF. The maximum typical rough opening height is limited to 48.50 in. and the typical rough opening width is limited to 48.5 in.


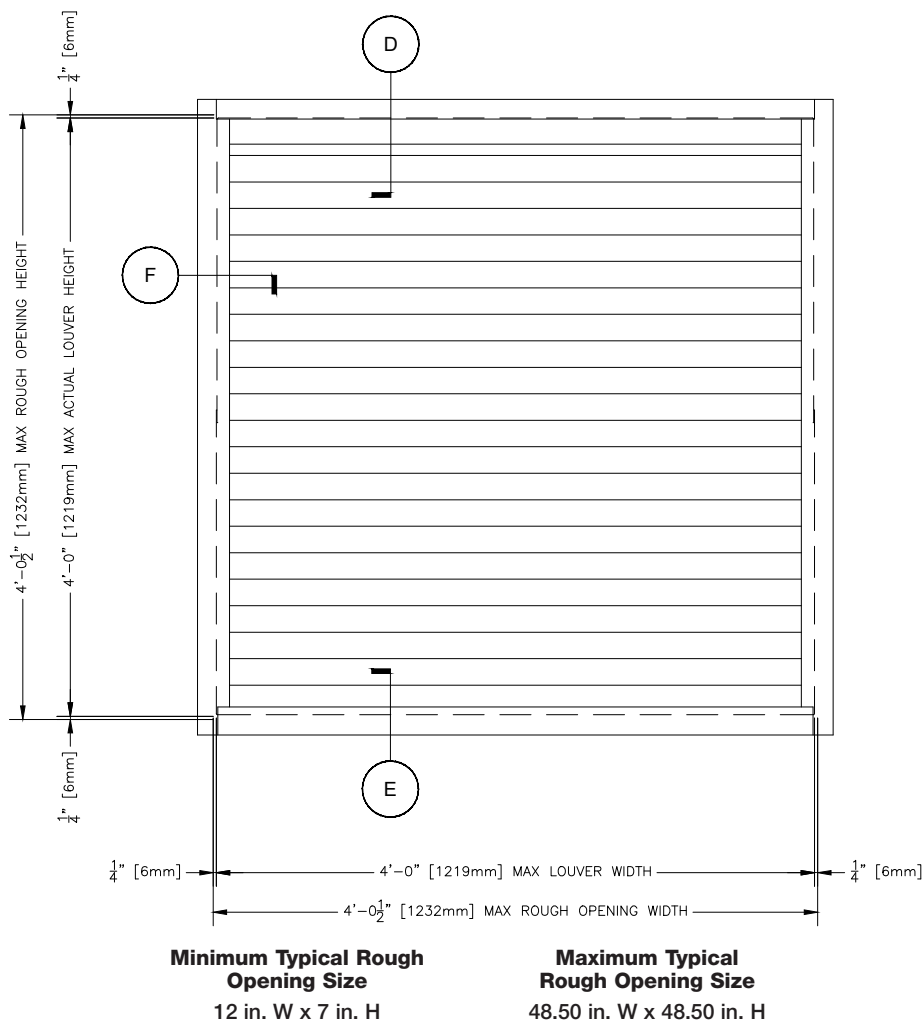


### Building Condition/Substrate Limitations


#### Flange/Sleeve Installation

- Any substrate acceptable that is capable of withstanding imposed loads.

# Flange/Sleeve Installation

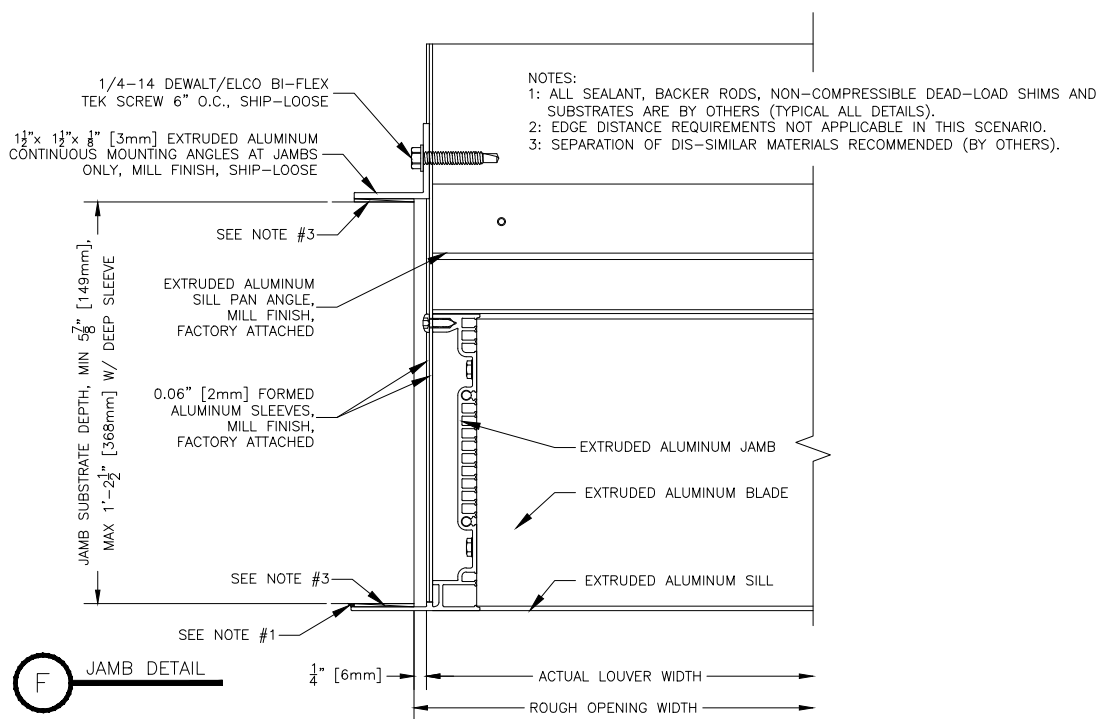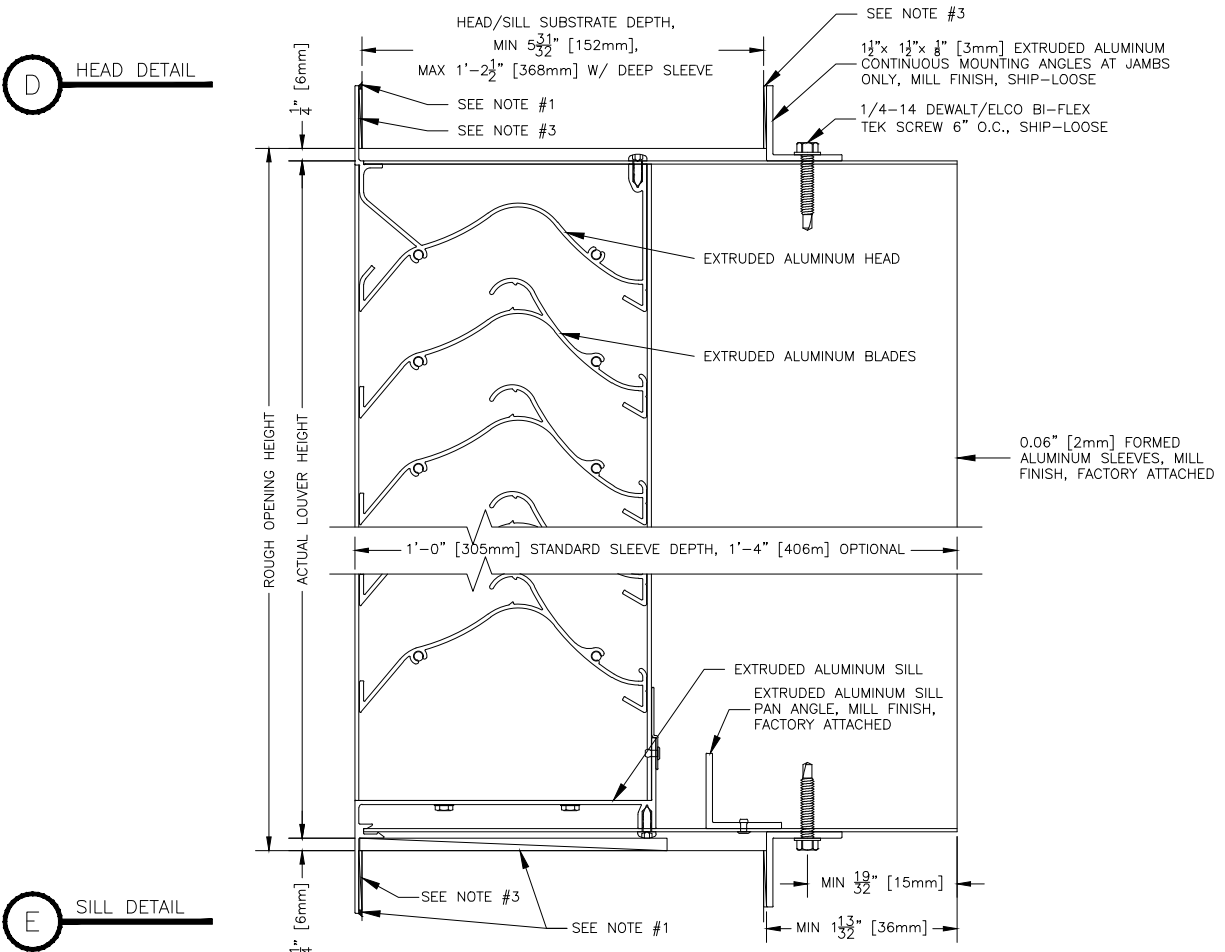

## Flange/Sleeve Installation

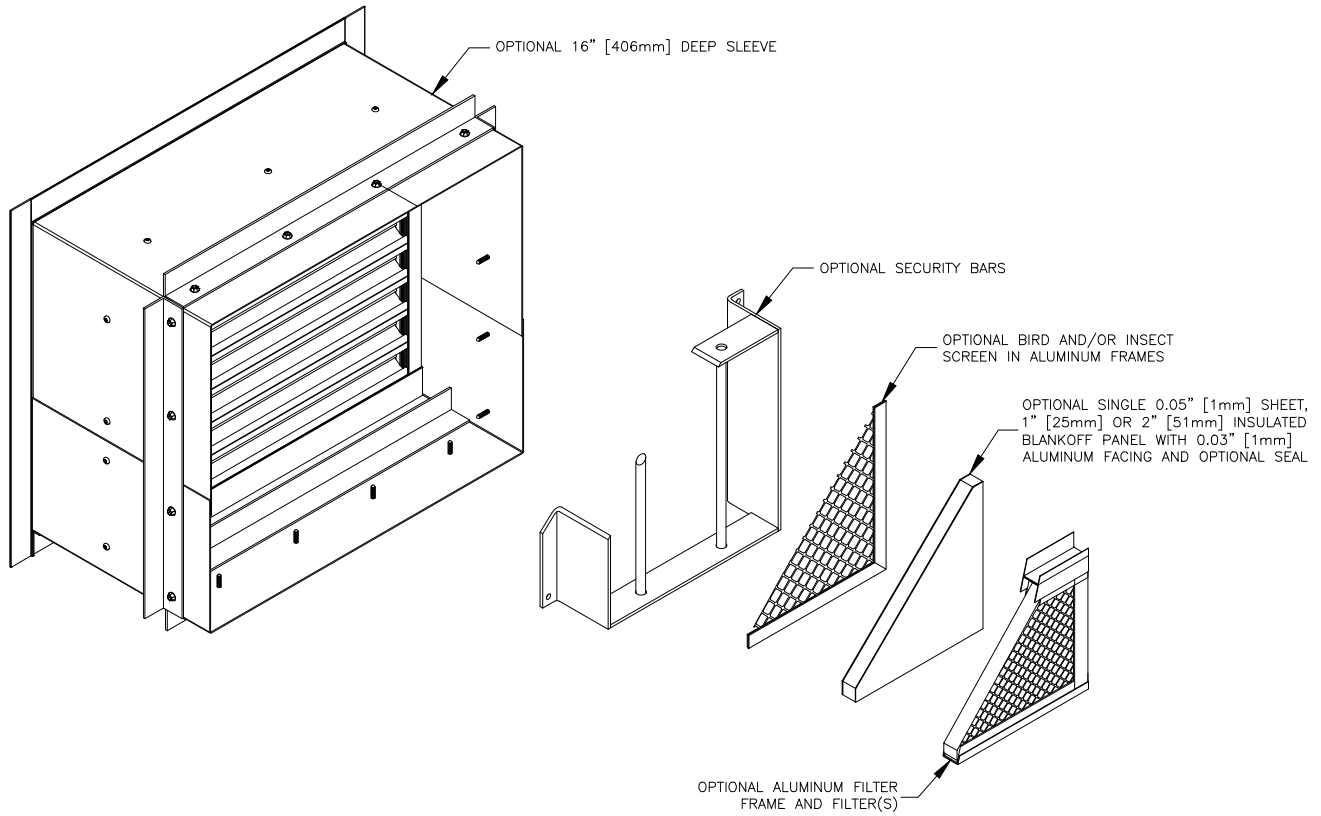

The look that works.™

P.O. Box 410, 525 Western Road, Schofield, WI 54476-0410 USA  
715.841.8757 • fax 715.841.8773 • www.airolite.com

*As a result of our commitment to continuous improvement, Aiolite reserves the right to change specifications without notice.*